

Robin Boxes



Data Sheet




POWERED BY
RIJSWAARD®
BAKSTEEN

DRAWING AND SPECIFICATION

Box Dimension – Core box, not the brick coursing size


Specification	Value
External Dimensions (W × H × D)	215 × 215 × 150 mm
Internal Dimensions (W × H × D)	175 × 175 × 110 mm
Entrance Opening	100 × 43 mm – R51
Distance from Floor to Entrance	60 mm
Complies With	BIJ12 Songbird Knowledge Document

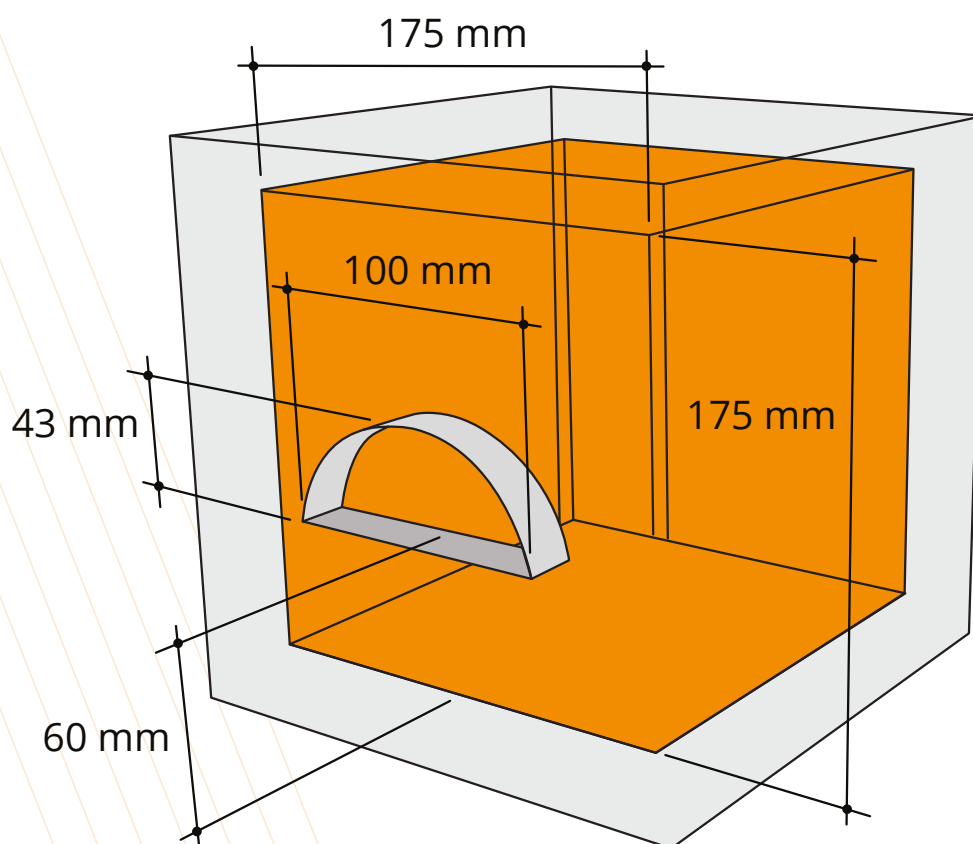

BRICK DIMENSIONS

Box Dimension – Brick coursing, post fabrication

Specification	Value
Finished Article Number	ROBINBOX
External Dimensions (W × H × D)	440 × 215 × 205 mm
Entrance Opening	100 × 43 mm – R51
Distance from Floor to Entrance	60 mm

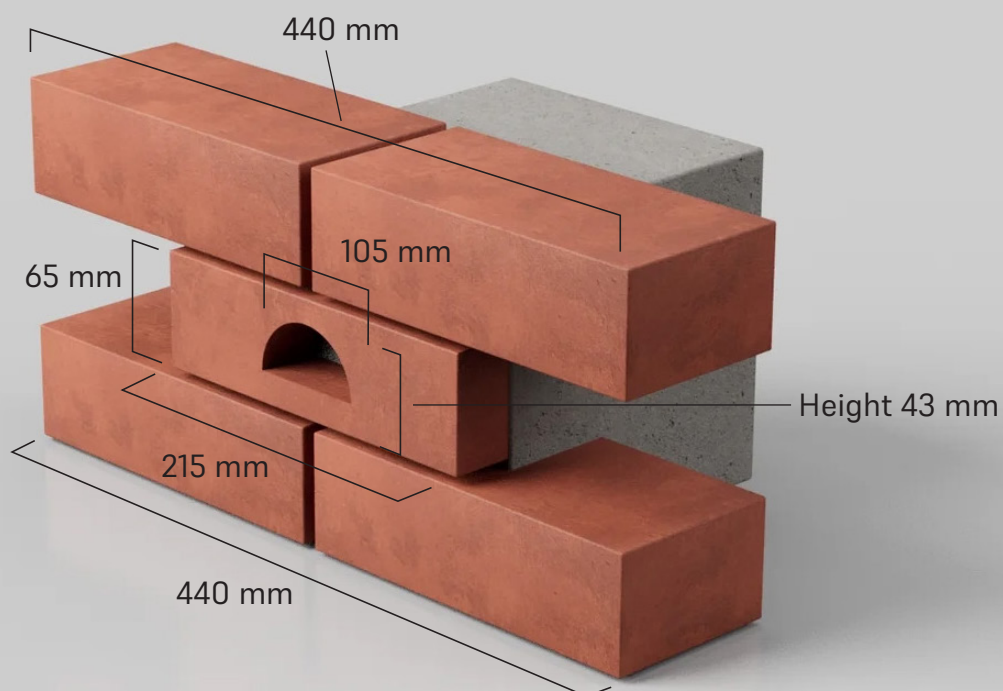

NEST ENVIRONMENT

Suitable nest environment for:

- Black Redstart
- Common Redstart
- Spotted Flycatcher
- White Wagtail
- Robin
- Wren

It is also occasionally used by tits (Paridae species). The location where the nest brick is installed will partly determine which species may use.

Installation

The semi-open integrated nest brick can be incorporated into both **new-build** and **renovation** projects.

The dimension of the finished fabricated units are designed to match the brick format and bond pattern specified in your order. Our imagery demonstrates UK format (215mm L x 65mm H x 102.5mm D), we can accommodate differing brick sizes and bond patterns.

Installation guidance:

- The front face of the nest brick should be flush with the front face of the wall.
- Cavity wall insulation can continue uninterrupted behind the unit, preventing a cold bridge.
- If insulation must be removed, it should be cut back generously around the perimeter of the unit.
- The void behind the nest brick should then be filled with rigid insulation.
- Preferably install on a **north-facing or east-facing elevation**.
- Minimum installation height: **3 metres above ground level**.
- Avoid installation on south-facing or **south-west-facing elevations** due to exposure to driving rain.
- No nest material needs to be added.

MAINTENANCE

Maintenance requirements:

If the nest brick is easily accessible, any nest can be removed after the breeding season.

However:

- Cleaning of the nest box is not necessary.
- No other maintenance is required for this integrated nest brick.

ANNEX OF MATERIALS

Core box:

- 5 x sides - wood-stone.
- Rear face – Ply Wood.

External face:

- AAB or customer brick.
- Epoxy Resin.

INDEPENDENT APPROVALS



All About Bricks Ltd

Unit 10 Maisies Way
South Normanton
Derbyshire
DE55 2DS

Tel: 01623 573178
e-mail: info@aab.build
Web: www.aab.build



POWERED BY
RIJSWAARD®
BAKSTEEN